



Refractories for the  
cement industry

**KILN**

# Contents

<b>1</b>	<b>Manufacturing and quality assurance</b>	
	The cement specialists	3
	How to contact us	3
<b>2</b>	<b>Kiln</b>	
	Lining your kiln	5
	Inlet cone	6
	Inlet zone	7
	Safety zone	7
	Upper transition zone	8
	Burning zone	9
	Lower transition zone	10
	Cooling zone / Nose ring	11
	Heating-up curves for basic bricks	12
<b>3</b>	<b>Linometer XLNT</b>	
	Linometer XLNT	13
<b>4</b>	<b>Page for own notations</b>	
	Page for own notations	14



# The Cement Specialists

The special demands of cement manufacturing have always required specialized refractories – especially now, when more and more alternative fuels are used.

That's where we excel. Höganäs Bjuf refractory products improve profitability for cement manufacturers in more than 60 countries on six continents. We deliver refractory solutions that perform better, last longer, and give you lower refractory cost per ton of clinker produced – especially if you are burning alternative fuels.

Höganäs Bjuf is a multinational organization, part of Borgestad Industries. Our activities range from applications-driven R&D, production, distribution, support and service to complete refractory management, including wrecking and installation. R&D, production and corporate headquarters are located in Sweden, with sales and support in more than forty countries around the world.



## How to contact us

Höganäs Bjuf is headquartered in Bjuv, Sweden, with subsidiaries in France, Germany, Poland, Russia, the Middle East, Malaysia and the Philippines, and agents and representatives around the world.



### Höganäs Bjuf AB


Box 502  
SE-267 25 Bjuv  
Sweden

Tel: +46 42 855 00  
Fax: +46 42 855 66

Business hours: M-F, 08-1630 CET

To find your local contact, please call or fax us at the numbers above. Up-to-date contact information can also be found at:  
[www.cement.hoganasbjuf.com](http://www.cement.hoganasbjuf.com)

## 2. Kiln

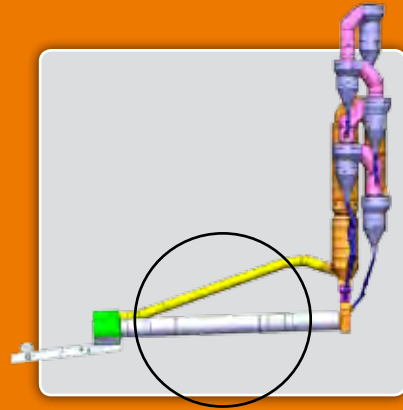

In this section, we focus on dry-process kilns, as they represent the majority of kilns now in use. The refractory requirements of wet- and semi-dry process kilns are essentially similar after the inlet stage.

## Fuel efficiency and waste fuels

Today's kilns have shorter lengths without loss of production capacity.

Many producers use the kiln to burn waste materials – a good source of low-cost energy. Widespread use of alternative fuel causes problems for the refractories that are used.

High-temperature areas, usually lined with basic bricks, require higher refractoriness, alkali- and thermal shock resistance, and better resistance to clinker liquid phase corrosion.

## Don't ignore the tire rings

When starting up a cold kiln, it is important to allow time for the tire rings to expand in pace with the kiln shell's expansion.

If heat-up is too rapid, the colder tire rings can cause shell deformation, thus crushing refractories. When the tire rings later expand to full operating dimensions, this can cause 'rolling ovality' in the kiln shell. Refractories not already damaged by the earlier deformation will then suffer radial abrasion, with potentially catastrophic lining loss as a result.


## Lining your kiln

The following is Höganäs Bjuf's suggestion for lining your kiln, both for standard and alternative fuels. Brick or monolithic?

With the exception of the inlet cone and the nose ring, the kiln should always be lined only with brick. Brick heights, which depend on kiln diameter, range from 200 mm and up.

On the following pages, we deal specifically with the following areas of the kiln:

■ Inlet cone	①
■ Inlet zone	②
■ Safety zone	③
■ Upper transition zone	④
■ Burning zone	⑤
■ Lower transition zone	⑥
■ Cooling zone	⑦
■ Nose ring	⑧

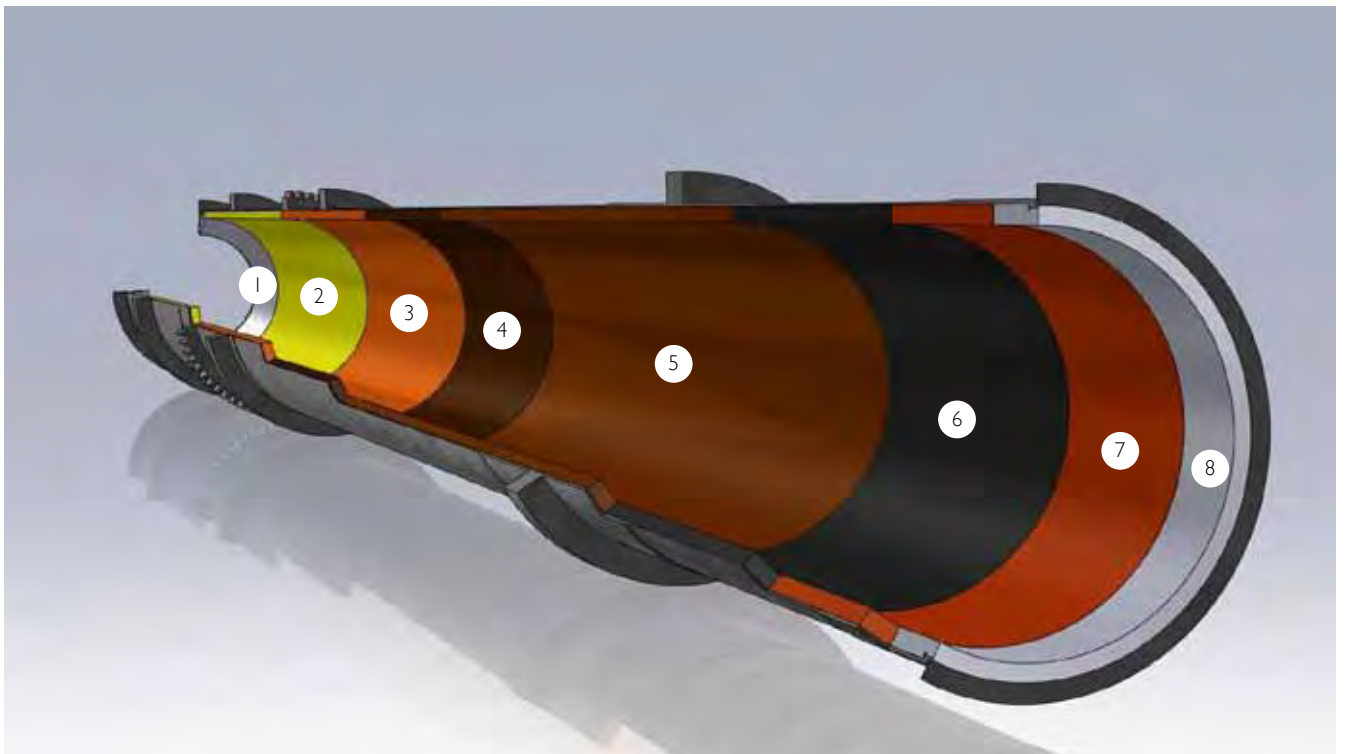


## Inlet cone I

The most important considerations here are alkali-resistance. Raw meal can quickly deteriorate refractories that are not resistant, and temperature fluctuations can cause condensation of alkaline vapors in the refractory lining.



Inlet cone - casted

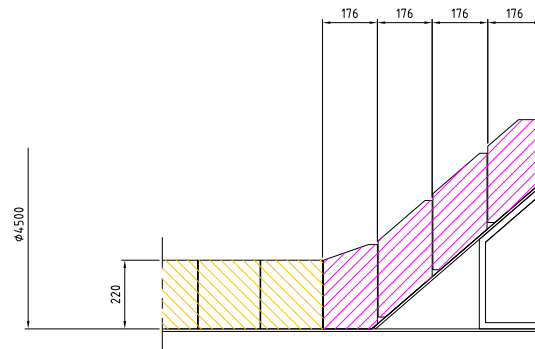

Inlet cone - bricked

### INLET CONE

Refractory lining thickness: 200-250 mm, depending on kiln diameter

	BRICK	MORTAR	MONOLITHICS	ANCHORS	SHELL PROTECTION
STANDARD	Viking 330	Victor H15	Denscast 50A QF	Stainless Steel	
ALTERNATIVE FUELS	Viking 330	Victor H15	Denscast AXL QF	Stainless Steel	Coro Tex Pro

Above suggestions is guiding principles.

Note that each kiln is individual and for precise recommendation, please contact Högånäs Bjuf.

## Inlet zone ②

The primary criteria here are alkali-resistance.

### INLET ZONE

Refractory lining thickness: 200-250 mm, depending on kiln diameter

	BRICK	MORTAR	SHELL PROTECTION
STANDARD	Viking 330	Victor H15	
ALTERNATIVE FUELS	Viking 450	Victor H15	Coro Tex Pro

Above suggestions is guiding principles.

Note that each kiln is individual and for precise recommendation, please contact Höganäs Bjuf.

## Safety zone ③

The primary criteria here are alkali- and abrasion-resistance. Brick lining should have a progressively increasing refractoriness and alumina content. Low thermal conductivity is good if the reaction occurring is still endothermic, but insulation benefits should be weighed against the risk of alkaline attack and thermal overload.



### SAFETY ZONE

Refractory lining thickness: 200-250 mm, depending on kiln diameter

	BRICK	MORTAR	SHELL PROTECTION
STANDARD	Viking 450/ Alex	Victor H15	
ALTERNATIVE FUELS	Viking 450/ Alsic 500/ Alex	Victor H15	Coro Tex Pro

Above suggestions is guiding principles.

Note that each kiln is individual and for precise recommendation, please contact Höganäs Bjuf.

## Upper transition zone

4

When liquid phase begins to appear in the raw meal, the kiln lining becomes more vulnerable. This occurs in the upper transition zone. The more variables that occur, the greater is the need for the correct magnesia-based refractories. Variables include:

- Variations in oxygen potential, caused by use of multiple fuels. After several redox cycles, some brick qualities may become weak and friable.
- Operation with an unstable coating – caused by a variety of factors. Brick becomes exposed to infiltration by clinker liquid phase.
- Direct action of alkali chlorides and sulfates, a result of using several waste fuels. Brick may subsequently cap.
- Build-up of abnormal rings, resulting from unbalanced sulfate modulus.
- Kiln shell corrosion, caused by sulfate and chloride diffusion through the refractory, can result from the burning of some waste fuels.



### UPPER TRANSITION ZONE

Refractory lining thickness: 200-250 mm, depending on kiln diameter

	BRICK	MORTAR	SHELL PROTECTION
STANDARD	Magkor-S20-LE	(Magnebond 80)	
ALTERNATIVE FUELS	Magkor-B Magkor-B-LP	Magnebond 80	Coro Tex Pro

Above suggestions is guiding principles.

Note that each kiln is individual and for precise recommendation, please contact Höganäs Bjuf.

## Burning zone

5

Two factors are paramount to the optimal functioning of the burning zone. First, and most manageable from the technical viewpoint, is the question of combustion engineering - the achievement of proper flame pattern, heat and combustion.

Successful combustion engineering supports optimum clinker formation, and minimizes wear and stress on refractories and kiln shell.

Poor combustion engineering leads to thermal overload and rapidly fluctuating redox conditions, which are bad for both refractory lining and clinker. Thermal overload will ultimately cause the refractory to melt. Redox conditions lead to the brick's accelerated friability, or brittleness.

The second factor is equally important: the generation of clinker coating on the refractory brick. This protects the brick and helps the clinkerization reaction throughout the kiln.

Several variables can affect the maintenance of this coating:

- Large fluctuations in raw meal parameters and poorly nodularised clinker can result in liquid phase segregation, which reduces the thickness and stability of the coating.
- The use of high-sulfur fuels, combined with poor combustion engineering, can lead to a higher sulfate compound volatilization and ring formation build-ups.
- A number of factors can cause coating to disappear completely, with a resulting tendency for the brick to become weak and friable due to thermomechanical fatigue.



Among them are:

- Production of high  $\text{SiO}_2$  clinker
- Production of sulfate-resistant clinker with  $\text{C}_3\text{A}$  (3 % as result of  $\text{Fe}_2\text{O}_3$  addition).
- Prolonged thermal overload
- Frequent shifting of fuel type
- White cement production

Some of these factors increase the risk of corrosion of the bricks'  $\text{MgO}$ ,  $\text{Al}_2\text{O}_3$  spinel. This is due to attack by  $\text{CaO}$  and  $\text{C}_3\text{A}$  which can cause formation of  $\text{MgO}$  and  $\text{Cl}_2\text{A}_7$ .

### BURNING ZONE

Refractory lining thickness: 200-250 mm, depending on kiln diameter

	BRICK	MORTAR	SHELL PROTECTION
STANDARD	Magkor-A	(Magnebond 80)	
ALTERNATIVE FUELS	Magkor-B-RA	Magnebond 80	Coro Tex Pro

Above suggestions is guiding principles.

Note that each kiln is individual and for precise recommendation, please contact Höganäs Bjuf.

## Lower transition zone ⑥

Though less complex, the variables that affect this zone are still extensive.

Excessive ovality of, or damage to, the kiln shell causes mechanical stress. This can lead to crushing and displacement of refractories and, ultimately, may cause a catastrophic twisting of the brick lining.

Use of alternative fuels with high alkaline and sulfur content may lead to "capping", caused by the infiltration and condensation of alkalis in the brick. This phenomenon can also occur as a result of thermal overload, or from firing with the burner tip coincident with the nose ring or outlet zone. Thermal overload can also cause spalling, a result of thermal shock.

Very abrasive "dusty" clinkers - high in  $\text{SiO}_2$  - can cause high abrasion wear on refractories.



Clinker that has a high liquid phase content with low viscosity may lead to a ring formation build-up, as well as "capping". Ring formation can also result from thermal overload, as well as the use of high-alkali, high-sulfur fuels.

### LOWER TRANSITION ZONE

Refractory lining thickness: 200-250 mm, depending on kiln diameter

	BRICK	MORTAR	SHELL PROTECTION
STANDARD	Magkor-B	(Magnebond 80)	
ALTERNATIVE FUELS	Magkor-B-LP	Magnebond 80	Coro Tex Pro

Above suggestions is guiding principles.

Note that each kiln is individual and for precise recommendation, please contact Högånäs Bjuf.

# Cooling zone / Nose ring

⑦ ⑧

The discharge zone is often severely stressed. Abrasive clinker outfall can cause wear on both refractory linings and steel segments, and thermal shock and axial expansion often accelerate refractory wear.

Original brick linings should be of flexible, highly abrasion-resistant brick.

When steel nose ring segments become worn out, producers have two alternatives: to replace them and reline with brick, or keep them and switch to a castable lining. Höganäs Bjuf can supply cost-effective refractory solutions for both alternatives.





## COOLING ZONE / NOSE RING

Refractory lining thickness: 200-250 mm, depending on kiln diameter

	BRICK	MORTAR	MONOLITHICS	ANCHORS	SHELL PROTECTION
STANDARD	Victor 60/70/80 RK	(Victor T)	Denscast 80 QF	Stainless Steel	
ALTERNATIVE FUELS	Alsic 500/ Alsic 4000	Victor T	Denscast AXL QF	Stainless Steel	Coro Tex Pro


Above suggestions is guiding principles.

Note that each kiln is individual and for precise recommendation, please contact Höganäs Bjuf.

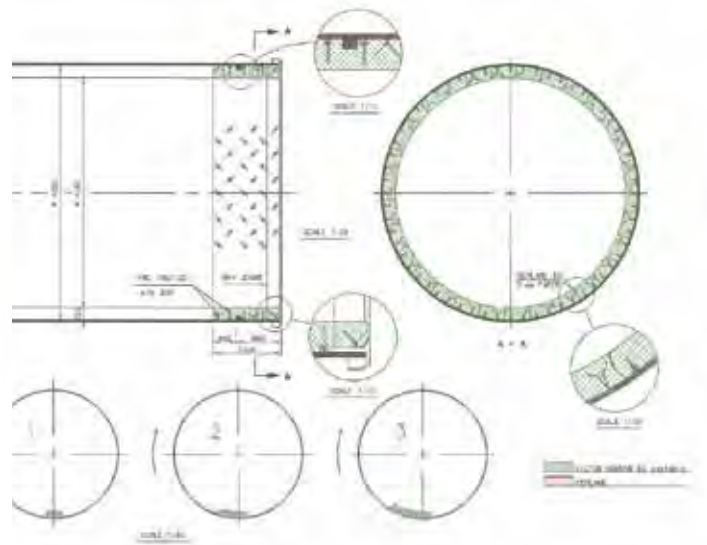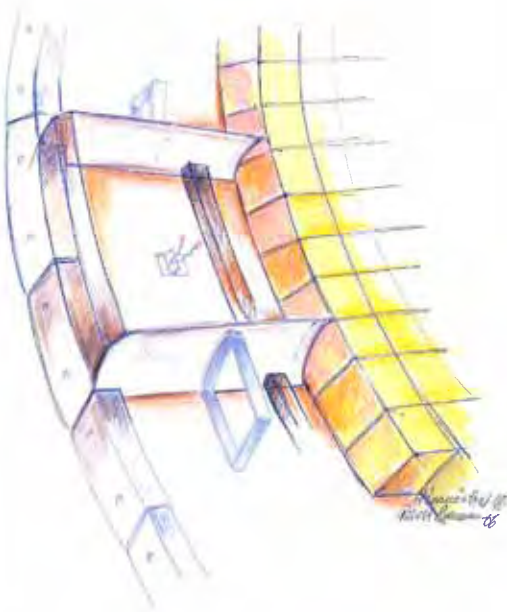

# Heating-up curves for basic bricks

1. After shutdowns during which the burning zone does not cool below 300 °C
2. After repairs comprising up to 30 lin m of kiln lining.
3. For new plants with an average capacity of 2000 t/day. In the case of larger plants the heating-up time should be increased by 10 to 20 percent

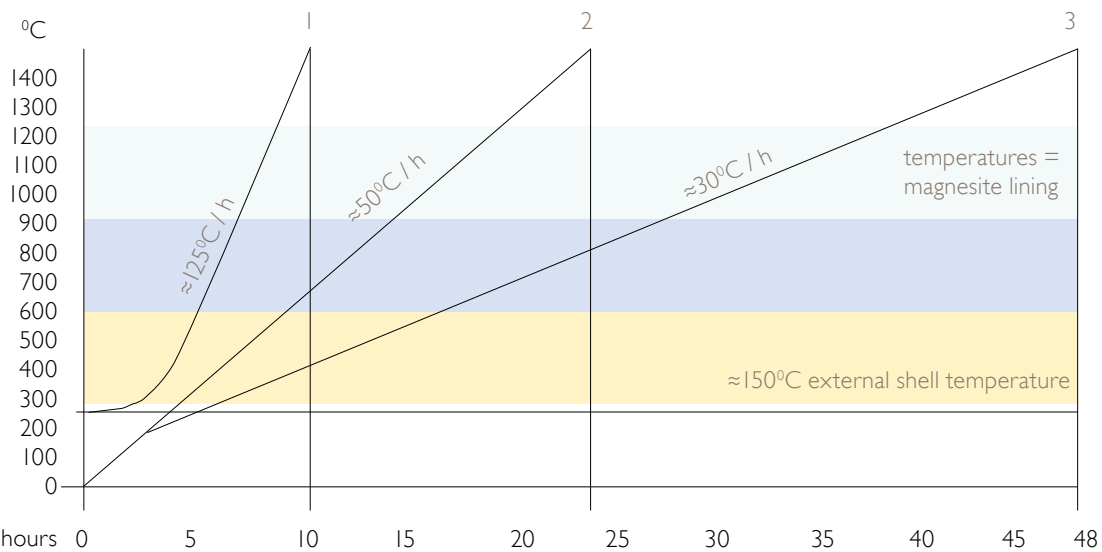

- Kiln rotation:
- 1) In the temperature range of 300<sup>o</sup>-500<sup>o</sup>C: revolution every 30 minutes
  - 2) In the temperature range of 600<sup>o</sup>-800<sup>o</sup>C: revolution every 15 minutes
  - 3) In the temperature range of 900<sup>o</sup>-1100<sup>o</sup>C: continuous rotation at lowest speed
  - 4) In the temperature range from 1200<sup>o</sup>C to working temperature: bring the kiln up to normal operation

# Non-destructive lining measurement in seconds

## Höganäs Linometer XLNT

Unlike traditional lining measurement, which requires you to drill holes in your lining, the Linometer XLNT only needs a small patch of coating to be scraped from the brick surface for you to measure lining thickness with up to 99% accuracy.

It takes just seconds to get a correct reading. You can measure a whole section of your kiln in less than 30 minutes.

Because it is quick and completely non-destructive, you can also make more measurements, more often. This gives you a truly accurate picture of your lining's condition, and lets you plan and rationalize your lining replacement.

The Linometer XLNT is packed with features that improve your measurement accuracy while giving you instant feedback on changes in your lining:

- Up to twelve unique measurements can be made at each measuring point, for a detailed picture of the lining's condition.
- Up to 72,000 unique measurements can be made and stored in the Linometer itself. You don't need to make notes, and you get on-the-spot comparisons for previously stored measurements at the same point.
- Data can be downloaded directly to computer, and imported into an Excel spreadsheet.

But the bottom line is your profit. Spend more time making cement, and less in kiln maintenance. That is the goal the Höganäs Linometer helps you to achieve!



The laser guide gives you precise measuring points on the length of the kiln.

PVC probe with 110 x 120 mm face. The probe's small 'footprint' requires minimal coating removal.

Linometer XLNT, probe and extension rod together weigh less than 1.7 kg (3.8 lbs).

Easy user navigation via the keypad.

LCD digital display in millimeters or inches. Low battery indicator.

Telescoping aluminum extension arm, extendable up to 1.5 m (5').







## Our offices

### HEAD OFFICE:

Höganäs Bjuf AB | Box 502 | SE-267 25 Bjuv | Sweden  
Phone: +46 42 855 00 | Fax: +46 42 855 66

Höganäs Bjuf Eastern Europe  
Branch Office Poland  
ul. Lipowa 3  
PL-44-100 Gliwice  
Poland

Höganäs Bjuf Asia Pacific Sdn. Bhd.  
No. 11-5, Block E2  
Jalan PJU 1/42A, Dataran Prima  
47301 PETALING JAYA  
Selangor, Malaysia

Höganäs Bjuf Middle East Ltd.  
5, Omirou Ave.  
(5th floor) Optical House  
CY-1097 Nicosia, Cyprus

[www.cement.hoganasbjuf.com](http://www.cement.hoganasbjuf.com)

Höganäs Bjuf AB Russia  
Tel./Fax: + 7 495 925 77 42  
Mob.: + 7 916 143 20 13  
E-mail: [Andrey.Spitsin@hoganasbjuf.se](mailto:Andrey.Spitsin@hoganasbjuf.se)

Höganäs Bjuf France SARL  
318 Chemin des Ecoliers  
FR-06730 ST.ANDRE  
France

Höganäs Bjuf Germany GmbH  
Mühlengest 11  
DE-59320 ENNIGERLOH  
Germany

[cement@hoganasbjuf.se](mailto:cement@hoganasbjuf.se)